

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(A)




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : A61B 5/12, A61F 11/00	A1	(11) International Publication Number: WO 94/14376 (43) International Publication Date: 7 July 1994 (07.07.94)
(21) International Application Number: PCT/AU93/00670 (22) International Filing Date: 22 December 1993 (22.12.93) (30) Priority Data: PL 6522 22 December 1992 (22.12.92) AU (71) Applicant (for all designated States except US): COCHLEAR PTY. LTD. [AU/AU]; 14 Mars Road, Lane Cove, NSW 2066 (AU). (72) Inventors; and (75) Inventors/Applicants (for US only): NYGARD, Tony, Mikeal [FI/AU]; 14 Stacey Close, Karing, NSW 2250 (AU). DALY, Chris, Newton [AU/AU]; 95 Beryl Crescent, Bilgola Plateau, NSW 2107 (AU). PATRICK, Jim, Finlay [AU/AU]; 5 Arding Street, Lane Cove, NSW 2066 (AU). MONEY, David, Kerry [AU/AU]; 50 Blackbutt Avenue, Pennant Hills, NSW 2120 (AU). (74) Agent: WATERMARK PATENT & TRADEMARK ATTORNEYS; Level 4, Amory Gardens, 2 Cavill Avenue, Ashfield, NSW 2131 (AU).		(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report.

(54) Title: TELEMETRY SYSTEM AND APPARATUS

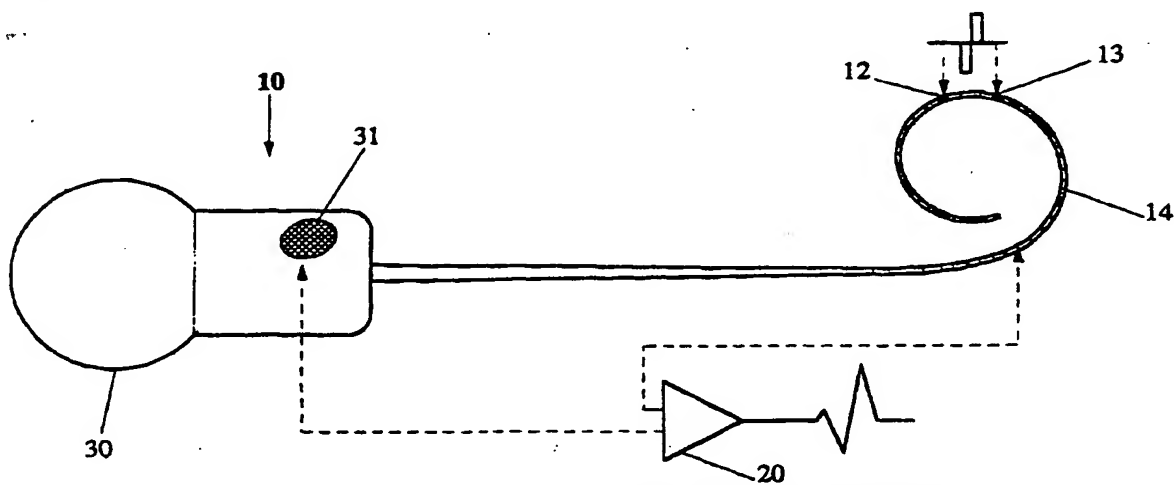

Note: INTERNAL TO IMPLANT

(57) Abstract

A system is disclosed for enabling telemetry from an audio prosthesis, preferably a cochlear prosthesis. An electrode array (10) is used for both delivering stimuli and for seeking evoked potentials. Preferably a delay is provided between stimulus and measurement. The sensing electrodes (14, 31) are distinct from the stimulus electrodes (12, 13).

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LE	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## TELEMETRY SYSTEM AND APPARATUS

### Field of Invention

This invention relates to a telemetry system and apparatus for recovering data from an auditory prosthesis.

### 5 Background Art

After an auditory prosthesis, such as a cochlear prosthesis, is surgically implanted, it is advantageous if data can be obtained about the actual performance of the electrode array, and the response of the auditory nerve to stimulation. This enables detection or confirmation of normal operation of the  
10 device, and optimisation of stimulus parameters in an objective fashion. Similar requirements apply to other implanted auditory prostheses.

It is an object of the present invention to provide a telemetry system for an auditory prosthesis such that the required data may be effectively, and with minimal inconvenience to a patient, monitored externally.

### 15 Summary of Invention

According to one aspect the present invention comprises a system for measuring the response of a neural system to stimulation by an auditory prosthesis, wherein selected stimulus electrodes provide an electrical stimulus, and after a predetermined period a potential is detected across a selected  
20 sense pair of electrodes, said potential being indicative of at least one parameter of response by said neural system.

Preferably after said electrical stimulus, all electrodes are open circuited for a predetermined period prior to said potential being detected. Preferably the system includes an amplifier and means for nulling said amplifier. Preferably  
25 said means for nulling nulls said amplifier during said predetermined period. Preferably said means for nulling comprises a plurality of cascaded gain stages, adapted at the end of said period to release said stages sequentially such that any offset voltage is substantially cancelled.

Preferably the stimulus electrodes are different to the sensing electrodes.

30 Preferably the auditory prosthesis is a cochlear prosthesis. Preferably the response measured is the evoked action potential of the auditory nerve.

Preferably said cochlear prosthesis includes an array of electrodes

including both intra-cochlear and extra-cochlear electrodes.

According to a further aspect the invention comprises a telemetry system for measuring the response of a neural system to stimulus by an auditory prosthesis, wherein said auditory prosthesis includes a electrode array, said  
5 array being used for stimulation and to sense said response.

Preferably said measurement occurs a predetermined time after stimulation has occurred.

Preferably after electrical stimulation, all electrodes are open circuited for a predetermined period prior to said response being detected.

10 Preferably the auditory prosthesis is a cochlear prosthesis. Preferably the response measured is the evoked action potential of the auditory nerve.

Preferably said cochlear prosthesis includes an array of electrodes including both intra-cochlear and extra-cochlear electrodes.

Preferably the stimulus electrodes are different to the sensing electrodes.

15 According to another aspect the present invention comprises an implantable auditory prosthesis, comprising an intra-cochlear electrode array, and at least one extra-cochlear electrode.

According to the present invention, it has been discovered that a most effective way of measuring response to neural stimulation, particularly for  
20 measuring evoked auditory potential but also applicable to other stimulation regimes, is to use the stimulus array itself to receive the response. To enable this to operate effectively, the electrodes of the stimulus array are preferably open circuited for a period, after which the induced response may be measured. This removes any requirement for additional separate measurement sensors to be  
25 implanted. In a multi-electrode array such as is generally utilised in a cochlear implant, different electrode pairs are preferably used for stimulus and measurement.

#### **Brief Description of Drawings**

The invention will now be described in more detail with reference to the  
30 drawings, in which:

Figure 1 illustrates the general arrangement of the inventive system;

Figure 2 is an overview in block form of the inventive system;

Figure 3 is a timing diagram showing the stimulus and measurement sequence: and

Figure 4 is a schematic diagram showing one circuit arrangement for the preferred amplifier arrangement according to the present invention.

## 5 Detailed Description

Referring to Figure 1, it is initially noted that the electrode array 10 is used both for stimulating, and for detecting the evoked response. Detected data is transmitted via the RF link already provided for transmitting power and data to the implant 10.

- 10 It will be noted that the implant, in addition to the intra-cochlear electrodes, preferably includes one or more extra-cochlear electrodes 31. For the telemetry of evoked neural potentials, it is greatly preferred to use different electrodes for delivering the stimulus, and for sensing the evoked action potential of the auditory nerve (EAP). Thus, for monopolar stimulation and  
15 measurement, one extra-cochlear electrode may be used for stimulating, and the other for sensing.

The EAP may according to the present invention be measured across any two sense electrodes. The waveform on the sense electrodes consists of the EAP nerve response plus the stimulus artefact. The stimulus artefact is decaying  
20 exponentially, but can in many cases be orders of magnitude larger than the nerve response itself. The electrode pair chosen will optimally detect maximum EAP gradient, and minimum stimulus artefact. The illustrative sense pair with reference to figure 1 uses intra-cochlear electrode 14 and extra-cochlear electrode 31.

- 25 Similarly, the stimulus pair 12, 13 may be any selected electrode pair. The optimal sense pair may vary with the stimulus pair selected, and may vary from patient to patient, as would be understood by those skilled in the art. Whilst it is preferred that the sense electrode pair be distinct from the stimulating electrode pair, the present invention encompasses the use of the same  
30 electrodes or electrode pair.

The sense pair potential difference is amplified by a suitable amplifier 20 to produce (ultimately) an EAP measurement on apparatus external to the

patient. The amplified signal is sampled at 16 intervals and transmitted via the RF link, each sample being a pair of pulses with a pulse separation proportional to the amplifier output.

Figure 2 illustrates in block form the internal and external aspects of the system.

Considering firstly the external system, the overall arrangement is controlled via digital processor 45, which may be a personal computer or similar device with suitable interfaces. Processor 45 drives the transmitter controller 46 and thus the transmitter stage 43 to send signals via RF link 41 to the implant 10. Transmitted telemetry data is received via RF link 41 passed through receiver 42 and comparator and timer/controller stage 44.

Commands are received in the implant 10 via RF link by receiver coil 30 and pass via receiver stage 32 to decoder/controller 34, which sends suitable commands to the EAP amplifier/telemetry controller 35 and to switch controller 36. Switch controller 36 controls the stimulation of selected pairs of electrodes. The sense electrode signal is amplified by EAP amplifier 40 and the telemetry controller processes the amplified signal for transmission via transmitter stage 33 and RF link 30 to the external system 40.

It will be appreciated that any suitable arrangement may be substituted for the precise arrangement outlined above. The overall technique for RF communication for powering and communicating with implanted devices is well known from, for example, commercially available devices manufactured by Cochlear Pty Ltd. However, the present invention should not be considered as limited to this mode of communication - the invention is independent of the communications mode, and could if desired be implemented in a directly connected system, for example. Preferably, the implanted system is integrated into a single chip as far as possible. Similarly, it will be apparent that with suitable modifications the present invention is applicable to other stimulation regimes and sites. The EAP application is used for the purposes of illustration.

The operation of EAP detection according to the present invention can best be understood with reference to the timing diagram of Figure 3. The top line illustrates stimulus via the stimulus electrode pair : the bottom represents



time. In the preferred embodiment the all electrodes are short circuit prior to time  $t_{-2}$  or stimulation.

At time  $t_{-2}$ , a stimulus pulse (illustratively a square biphasic pulse) is applied to stimulus pair 12, 13. Stimulus is completed at  $t_{-1}$  and all electrodes (including the stimulus electrodes) are left open circuit. The amplifier 35 is nulled until time  $t_0$ . At time  $t_0$  (for example), sampled measurements are taken at times  $t_1, t_2 \dots$  until time  $t_{16}$ . After  $t_{16}$ , the electrodes are again short circuited, ready for a further cycle of stimulus and EAP measurement. Note that short circuit before and after stimulus is one way of ensuring charge balance, but it is not necessary for recording the nerve response.

Preferably, the time between  $t_{-2}$  and  $t_0$  is about or slightly shorter than 400  $\mu\text{s}$ , as this is a typical time between stimulus onset and nerve response occurrence. Of course, this may be varied as is appropriate for a given application. The period between  $t_{-1}$  and  $t_0$  is preferably programmable such that the nulling period ends just before the expected EAP occurrence, thereby minimising the detection of stimulus artefacts. This programmable delay is controlled by the telemetry controller 35.

Open circuiting all electrodes (including the stimulus electrodes after stimulation) further reduces the stimulus artefact and the required dynamic range of the amplifier. This arrangement has a further advantage in that one of the sense electrodes can be connected to the common supply rail and a single ended amplifier can be used. If preferred, a fully differential input stage could be used instead of the single ended amplifier.

The sample intervals are typically 100  $\mu\text{s}$ , hence the sampling window is 1.5 to 2.0 ms. Both programmable delay time and the sampling period can be adjusted over a wide range to optimise the position and duration of the measurement window. This also allows recording of nerve responses other than the auditory response which result from the stimulus.

The measurement sequence is preferably repeated several times and averaged to further increase the signal to noise ratio of the measurement. The recorded signal required further post processing to eliminate the stimulus artefact from the composite signal. This could involve techniques known in this

art such as masking stimulus and alternate phase sequences.

Figure 4 illustrates a preferred implementation of the amplifier using four cascaded single-ended gain stages AMP<sub>0</sub>, AMP<sub>1</sub>, AMP<sub>2</sub>, AMP<sub>3</sub>. Illustratively, each stage has a gain of 20dB. Any suitable amplifier design may be used for individual gain stages, as would be well understood by those skilled in the art. All amplifiers are preferably nulled before the recording period ( initial delay ) and any offset voltage is stored on the input capacitors. The length of the nulling period is programmable and controlled by telemetry controller 35.

At the end of the nulling period (Figure 3,  $t_0$ ) the amplifier stages are released sequentially, so as to compensate for offset voltage due to the charge injection into the previous stage.

It can be seen from Figure 4 that AMP<sub>0</sub> and AMP<sub>1</sub> have a self-biased DC offset, while AMP<sub>2</sub> and AMP<sub>3</sub> are biased around  $V_{ref}$  which is approximately half way between the supply rails, so that the output range is optimised. The last 2 stages have switchable gain of 20dB or 0dB, and as a result the amplifier may be set for gain of 40,60 or 80dB.

This arrangement allows for accurate measurement of  $V_{EAP}$ , without the necessity to separately compensate or adjust for offsets.

It will be appreciated that variations and additions are possible within the spirit and scope of the invention.

## CLAIMS

1. A system for measuring the response of a neural system to stimulation by an auditory prosthesis, wherein selected stimulus electrodes provide an electrical stimulus, and after a predetermined period a potential is detected across a selected sense pair of electrodes, said potential being indicative of at least one parameter of response by said neural system.
2. A system according to claim 1, wherein after said electrical stimulus, all electrodes are open circuited for a predetermined period prior to said potential being detected.
3. A system according to claim 1 or claim 2, wherein the auditory prosthesis is a cochlear prosthesis.
4. A system according to claim 3, wherein said response measured is the evoked action potential of the auditory nerve.
5. A system according to any one of the preceding claims, wherein the stimulus electrodes are different to the sensing electrodes.
6. A system according to claim 3, wherein said cochlear prosthesis includes an array of electrodes including both intra-cochlear and extra-cochlear electrodes.
7. A system according to claim 2 including an amplifier and means for nulling said amplifier.
8. A system according to claim 7 wherein said means for nulling nulls said amplifier during said period.
9. A system according to claim 7 or claim 8 wherein said means for nulling comprises a plurality of cascaded gain stages, adapted at the end of said period

to release said stages sequentially such that any offset voltage is substantially cancelled.

10. A telemetry system for measuring the response of a neural system to stimulus by an auditory prosthesis, wherein said auditory prosthesis includes a electrode array, said array being used for stimulation and to sense said response.
11. A system according to claim 10, wherein said sensing occurs a predetermined time after stimulation has occurred.
12. A system according to claim 10, wherein after electrical stimulation, all electrodes are open circuited for a predetermined period prior to said response being sensed.
13. A system according to claim 12 including an amplifier and means for nulling said amplifier.
14. A system according to claim 13 wherein said means for nulling nulls said amplifier during said period.
15. A system according to claim 13 or claim 14 wherein said means for nulling comprises a plurality of cascaded gain stages, adapted at the end of said period to release said stages sequentially such that any offset voltage is substantially cancelled.
16. A system according to any one of claims 10 to 15, wherein the auditory prosthesis is a cochlear prosthesis.
17. A system according to claim 16, wherein said response measured is the evoked action potential.


18. A system according to claim 10, wherein said cochlear prosthesis includes an array of electrodes including both intra-cochlear and extra-cochlear electrodes.

19. A system according to any one claims 10 to 18, wherein the stimulus electrodes are different to the sensing electrodes.

20. An auditory prosthesis including a system according to any one of the preceding claims.

**THIS PAGE BLANK (USPTO)**

1/4

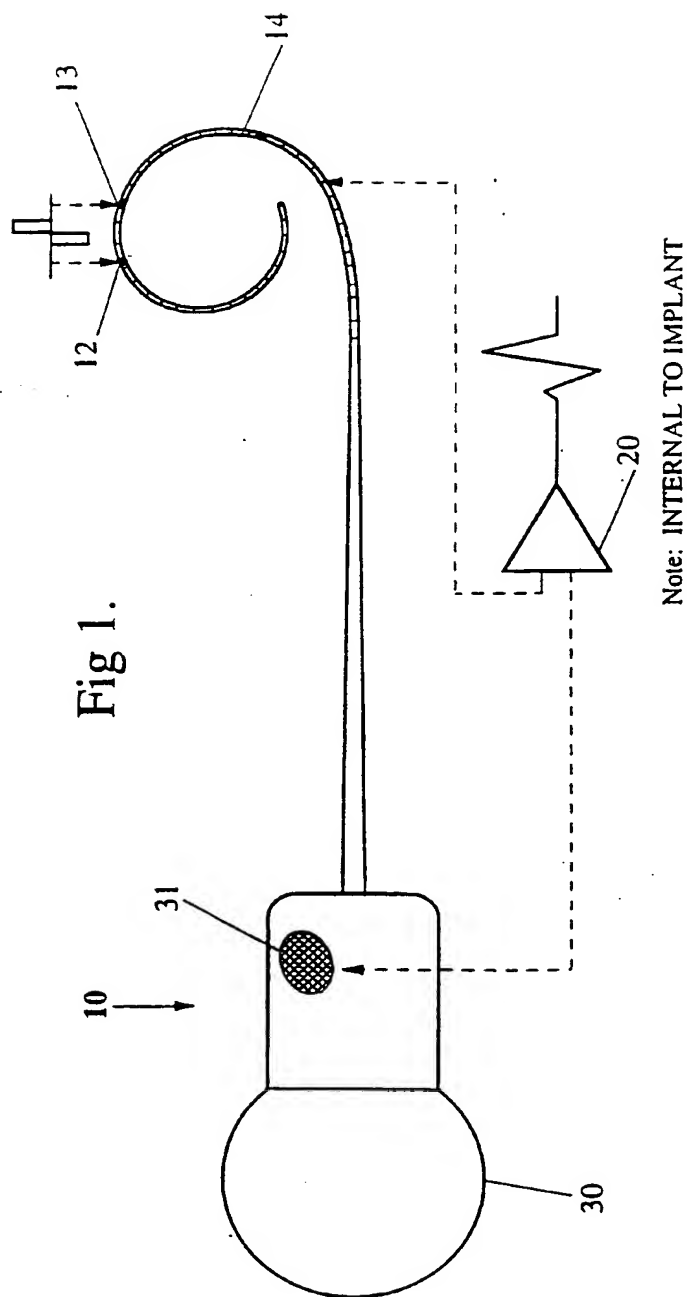

**THIS PAGE BLANK (USPTO)**




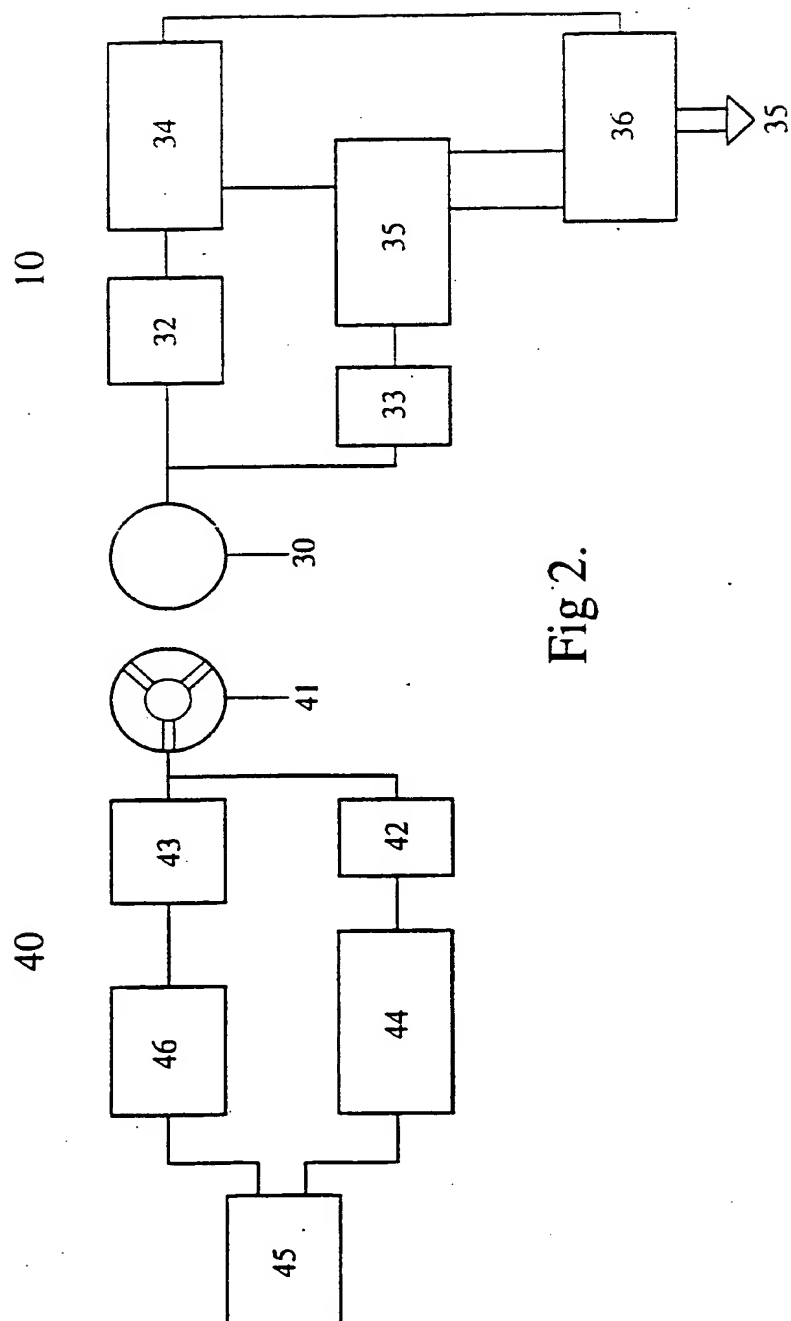


Fig 2.

**THIS PAGE BLANK (USPTO)**

3/4


Fig 3.

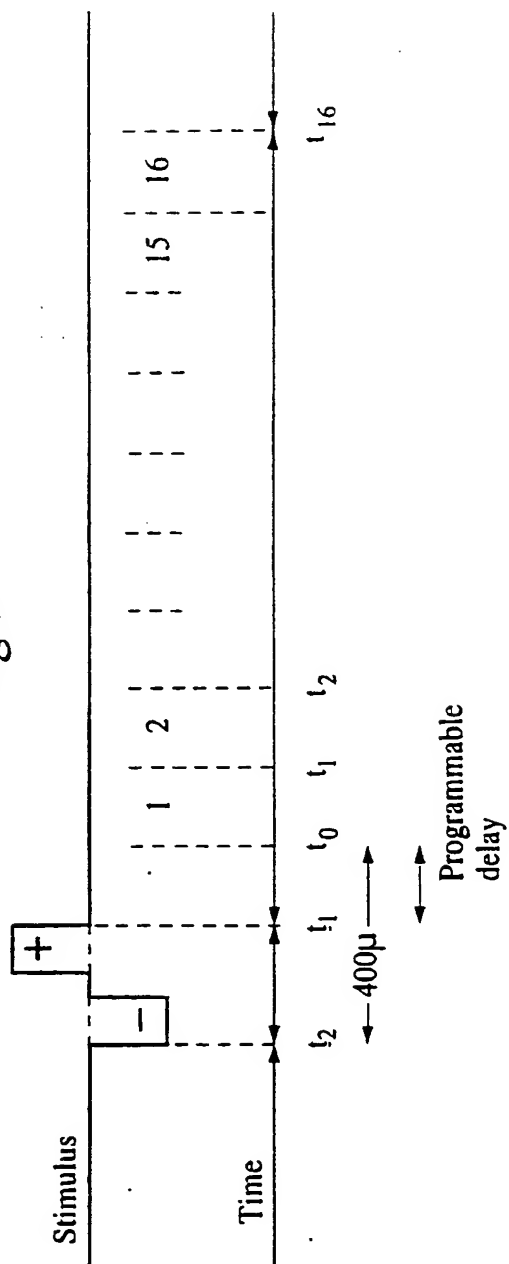

**THIS PAGE BLANK (USPTO)**

4/4


Fig 4.

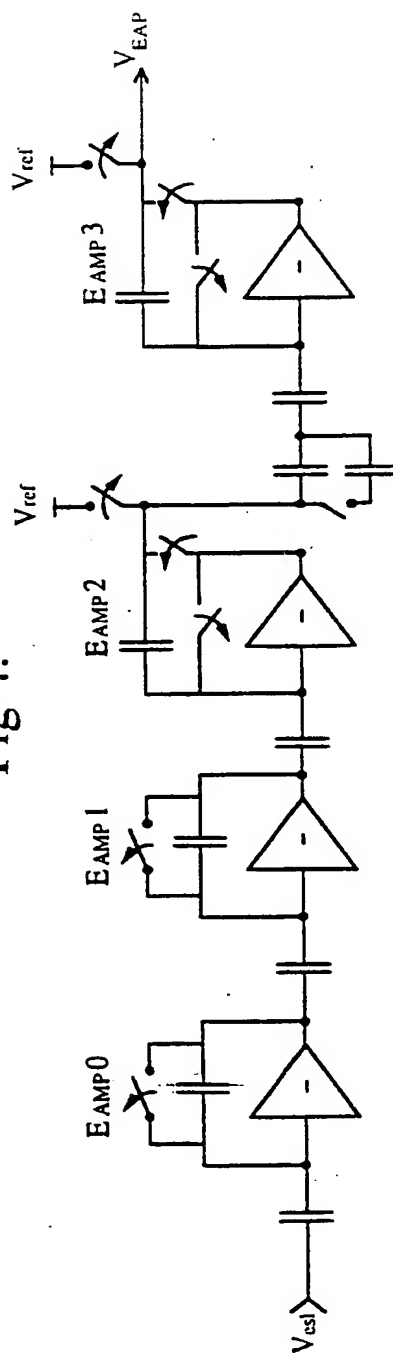

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 93/00670

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int. Cl. <sup>5</sup> A61B 5/12 A61F 11/00  According to International Patent Classification (IPC) or to both national classification and IPC												
<b>B. FIELDS SEARCHED</b>  Minimum documentation searched (classification system followed by classification symbols) IPC : A61B 5/12 A61F 11/00 11/04  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU : IPC as above  Electronic data base consulted during the international search (name of data base, and where practicable, search terms used) DERWENT: (1) electrocochleo: (2) (A61B 5/05) and (ear: or cochlear: or auditory) JAPIO												
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.										
X	US,A, 4535785 (VAN DEN HONERT et al) 20 August 1985 (20.08.85) column 8 line 1 - column 9 line 11, abstract, figures 3A, 3B	1, 3, 5 10										
Y	GB,A, 2124495 (TELETRONICS PTY LTD) 22 February 1984 (22.02.84) abstract, page 1 line 1 - page 2 line 120, page 4 line 11 - page 5 line 37 figure 3	10										
A	EP,A, 214527 (MINNESOTA MINING AND MANUFACTURING COMPANY) 18 March 1987 (18.03.87) See entire document	1-9										
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.												
* Special categories of cited documents : <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier document but published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier document but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 8 March 1994 (08.03.94)		Date of mailing of the international search report 16 March 1994 (16.03.94)										
Name and mailing address of the ISA/AU AUSTRALIAN INDUSTRIAL PROPERTY ORGANISATION PO BOX 200 WODEN ACT 2606 AUSTRALIA  Facsimile No. 06 2853929		Authorized officer for  SUE THOMAS  Telephone No. (06) 2832454										

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU 93/00670

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate of the relevant passages	Relevant to Claim No.
A	EP,A. 247649 (THE COMMONWEALTH OF AUSTRALIA) 2 December 1987 (02.12.87) See entire document	1-20
A	EP,A. 241101 (THE COMMONWEALTH OF AUSTRALIA) 14 October 1987 (14.10.87) See entire document	1-20
A	EP,A. 124930 (THE COMMONWEALTH OF AUSTRALIA) 14 November 1984 (14.11.84) See entire document	1-20



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/au 93/00670

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	4535785	US	4535785		
GB	2124495	AU	13595/83	AU	71088/87
		FR	2530949	FR	2531856
		GB	2124495	GB	2166606
		US	5046242	US	5272283
EP	247649	AU	26683/84	AU	73227/87
		CA	1212501	EP	124930
		EP	247649	JP	61001200
EP	241101	AU	26683/84	AU	73227/87
		AU	1212501	EP	124930
		EP	247649	JP	61001200
EP	124930	AU	26683/84	AU	73227/87
		CA	1212501	EP	124930
		EP	247649	JP	4012141
EP	214527	AU	60526/86	CA	1292285
		EP	214527	JP	62044250
		US	4706682	JP	63013983
				DK	3730/86
				NO	863310
				US	4988071
END OF ANNEX					

**THIS PAGE BLANK (USPTO)**